


Antitracking Power Cable

5 KV up to 35 KV Track Resistant Cable Two Layer

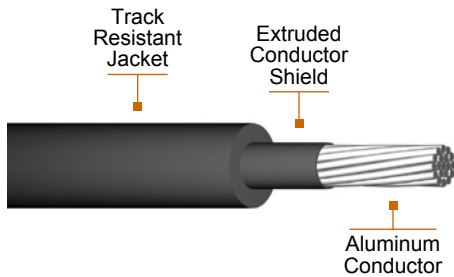

Detail Description or Construction

Conductor

AAC, AAAC or ACSR Stranded conductor

Conductor Shield

Extruded semi-conducting compound (15 kV up to 35 kV.)

Jacket

High Density Polyethylene (HDPE) or Cross-linked Polyethylene (XLPE)
90°C Track Resistant Black

Application

For use in primary aerial cable on pole.

Standards / Testing Specifications

- ICEA, IEC or any other international standard or customer specification

Marking

PHELPS DODGE - TYPE AND CONDUCTOR SIZE - RATED VOLTAGE - INSULATION / JACKET MATERIAL - DANGER HIGH VOLTAGE.

Installation

Aerial on pole.

Tables

Available upon request.