


## Triplex Service Drop

### Aluminum Triplex Service Drop Cable

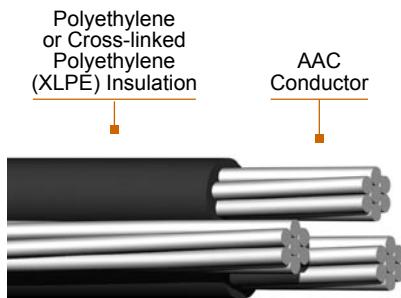

### Detail Description or Construction Conductor

Concentric strand or compressed 1350-H19 conductor. Concentric strand AAC, ACSR or AAAC alloy neutral messenger

#### Insulation

Polyethylene or Cross-Linked Polyethylene insulation (XLPE)

### Application

To supply power from the utility's lines to the consumer's servicehead.

### Standards / Testing Specifications

- B-230 Aluminum Wire, 1350-H19 for Electrical Purposes.
- B-231 Aluminum Conductors, Concentric-Lay-Stranded.
- B-232 Aluminum Conductors, Concentric-Lay-Stranded, Coated Steel Reinforced (ACSR).
- B-399 Concentric-Lay-Stranded 6201-T81 Aluminum Alloy Conductors.
- B-498 Zinc-Coated Steel Core Wire for Aluminum Conductors, Steel Reinforced (ACSR).
- Triplex Service Drop cable meets or exceeds all applicable requirements of ANSI/ICEA S-76-474.

### Marking

**PHELPS DODGE - CONDUCTOR TYPE AND SIZE - 600 V - INSULATION TYPE - YEAR OF MANUFACTURE.**

### Installation

For service at 600 volts or less (phase to phase) at a maximum conductor temperature of 75°C for Polyethylene insulation or 90°C for Cross-Linked (XLPE) insulation.



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	lbs / 1000'				A	Coils
			Bare	OD			XLPE	Aluminum	Total			
		mils	mils	mils		lbs			ft	ft		

AAC												
Halotis	6-Solid	45	162	252	6-7	563	28	74	102	78	1000	2500
Pike	6-7	30	184	244	6-7	563	21	75	96	78	1000	2500
Patella	6-7	45	184	274	6-7	563	32	75	107	78	1000	2500
Albus	6-7	60	184	304	6-7	563	43	89	133	78	1000	2500
Fusus	4-Solid	45	204	294	4-7	881	35	119	154	103	500	1700
Oyster	4-7	45	232	322	4-7	881	40	119	159	103	500	1500
Argo	4-7	60	232	352	4-7	881	54	119	173	103	500	1500
Clam	2-7	45	292	382	2-7	1350	51	189	241	136	500	1800
Thia	2-7	60	292	412	2-7	1350	67	189	257	136	500	1800
Mussel	2-7	45	292	382	2-7	1350	51	189	241	136	500	1800
Pyrula	1-7	60	328	448	1-7	1640	76	239	314	158	500	1500
Hyas	1-19	60	332	452	1-7	1640	77	239	315	158	500	1500
Murex	1/0-7	60	368	488	1/0-7	1990	86	259	345	182	500	1200
Purpura	1/0-19	60	373	493	1/0-7	1990	87	259	346	182	500	1200
Nasa	2/0-7	60	414	534	2/0-7	2510	98	380	477	210	--	1500
Trophon	2/0-19	60	419	539	2/0-7	2510	99	380	479	210	--	1500
Quahog	3/0-7	80	464	624	3/0-7	3040	144	479	622	242	--	1300
Ione	3/0-19	80	470	630	3/0-7	3040	146	479	624	242	--	1300
Melita	3/0-19	60	470	590	3/0-19	3310	113	479	592	242	--	1300
Coquina	4/0-7	60	522	642	4/0-7	3830	128	604	732	279	--	1000
Tusk	4/0-7	80	522	682	4/0-7	3830	163	604	767	279	--	1000
Apus	4/0-19	80	528	688	4/0-7	3830	165	604	769	279	--	1000
Portunus	4/0-19	60	528	648	4/0-19	4020	130	604	733	279	--	1000
Chiton	266.8-19	80	586	746	266.8-19	4970	186	761	947	310	--	1000
Nannynose	336.4-19	80	666	826	336.4-19	6150	216	959	1175	330	--	1000



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	lbs / 1000'				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
		mils	mils	mils								

### AAAC

Homarus	6-Solid	45	162	252	6-7	1100	28	79	107	78	1000	2500
Minex	6-Solid	45	162	525	6-7	1100	28	79	107	78	1000	2500
Cabera	6-7	45	183	273	6-7	1100	32	79	111	78	1000	2200
Hippa	6-7	45	183	273	6-7	1100	32	79	111	78	1000	2200
Artemia	4-Solid	45	204	294	6-7	1100	35	109	144	103	1000	1700
Maira	4-7	45	232	322	6-7	1100	40	126	166	103	1000	1700
Crab	4-7	45	232	322	6-7	1100	40	109	149	103	1000	1700
Luidia	4-Solid	45	204	294	6-7	1100	35	109	144	103	500	1700
Prawn	4-Solid	45	204	294	4-7	1760	35	126	161	103	500	1700
Metalia	4-7	45	232	322	4-7	1760	40	126	166	103	500	1500
Barnacles	4-7	45	232	322	4-7	1760	40	126	166	103	500	1500
Solaster	2-7	45	292	382	4-7	1760	51	173	224	136	500	1800
Pagarus	2-7	60	292	412	4-7	1760	67	173	240	136	500	1800
Shrimp	2-7	45	292	382	2-7	2800	51	200	251	136	500	1800
Lobster	2-7	60	292	412	2-7	2800	67	200	267	136	500	1800
Encope	1-19	60	332	452	2-7	2800	77	233	310	158	500	1200
Sandcrab	1/0-7	60	368	488	2-7	2800	86	275	361	182	500	1200
Echinus	1/0-19	60	373	493	2-7	2800	87	275	362	182	500	1200
Gammarus	1/0-7	60	368	488	1/0-7	4460	86	318	404	182	500	1200
Leda	1/0-19	60	373	493	1/0-7	4460	87	318	405	182	500	1200
Crayfish	2/0-7	60	414	534	2-7	2800	98	327	424	210	--	1500
Sipho	2/0-19	60	419	539	2-7	2800	99	327	426	210	--	1500
Dungenese	2/0-7	60	414	534	2/0-7	5390	98	400	497	210	--	1500



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	lbs / 1000'				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
			mils	mils			mils	lbs	A			
AAAC												
Cyclops	2/0-7	60	419	539	2/0-7	5390	99	400	499	210	--	1500
Slug	3/0-7	60	464	584	1/0-7	4460	111	437	548	242	--	1200
Fulgur	3/0-19	60	470	590	1/0-7	4460	113	437	550	242	--	1200
Balanus	3/0-19	80	470	630	1/0-7	4460	145	437	583	242	--	1200
Stonecrab	3/0-7	60	464	584	3/0-7	6790	111	505	616	242	--	1200
Flustra	3/0-7	60	470	590	3/0-7	6790	113	505	618	242	--	1200
Crisia	3/0-19	80	470	630	3/0-7	6790	145	505	651	242	--	1000
Squid	4/0-7	60	522	642	2/0-7	5360	128	551	679	279	--	1000
Arca	4/0-19	60	528	648	2/0-7	5360	129	551	680	279	--	1000
Bugula	4/0-19	80	528	688	2/0-7	5360	165	551	716	279	--	1000
Kingcrab	4/0-7	60	522	642	4/0-7	8560	128	637	764	279	--	1000
Lepas	4/0-19	60	528	648	4/0-7	8560	129	637	766	279	--	1000
Cassi	4/0-19	80	528	688	4/0-7	8560	165	637	802	279	--	1000



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	lbs / 1000'				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
			mils	mils								
ACSR												
Paludina	6-Solid	45	162	252	6-6/1	1190	28	75	114	79	1000	2500
Voluta	6-7	45	184	274	6-6/1	1190	32	75	118	79	1000	2200
Bolma	6-7	60	184	304	6-6/1	1190	43	75	130	79	1000	2200
Scallop	4-Solid	45	204	294	6-6/1	1190	35	104	151	138	500	1700
Strombus	4-7	45	232	322	6-6/1	1190	40	104	156	138	500	1500
Carnea	4-7	60	232	352	6-6/1	1190	54	104	170	138	500	1500
Whelk	4-Solid	45	204	294	4-6/1	1860	35	119	173	138	500	1700
Periwinkle	4-7	45	232	322	4-6/1	1860	40	119	177	138	500	1500
Calma	4-7	60	232	352	4-6/1	1860	54	119	191	138	500	1500
Cockle	2-7	45	232	322	4-6/1	1860	40	166	225	183	500	1800
Gebia	2-7	60	232	352	4-6/1	1860	54	166	238	183	500	1800
Conch	2-7	45	232	322	2-6/1	2850	40	189	258	183	500	1800
Uca	2-7	60	232	352	2-6/1	2850	54	189	272	183	500	1800
Vermeths	1-7	60	328	448	1-6/1	3550	76	238	351	210	500	1500
Atya	1-19	60	328	448	1-6/1	3550	76	289	352	210	500	1500
Janthina	1/0-7	60	328	448	2-6/1	2850	76	264	369	242	500	1200
Ranella	1/0-19	60	373	493	2-6/1	2850	87	264	380	242	500	1200
Neritina	1/0-7	60	368	488	1/0-6/1	4380	86	301	433	242	500	1200



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	lbs / 1000'				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
			mils	mils			mils	lbs	A			

ACSR												
Cenia	1/0-19	60	373	493	1/0-6/1	4380	87	301	434	242	500	1200
Cavolinia	2/0-7	60	414	534	1-6/1	3550	98	333	468	279	--	1900
Clio	2/0-19	60	419	539	1-6/1	3550	99	333	469	279	--	1500
Runcina	2/0-7	60	414	534	2/0-6/1	5300	98	379	535	279	--	1500
Triton	2/0-19	60	419	539	2/0-6/1	5300	99	379	537	279	--	1500
Sanddollar	3/0-7	60	464	584	1/0-6/1	4380	111	420	578	322	--	1300
Aega	3/0-19	60	470	590	1/0-6/1	4380	113	420	579	322	--	1300
Pisa	3/0-19	80	470	630	1/0-6/1	4380	145	420	612	322	--	1300
Cherrystone	3/0-7	60	464	584	3/0-6/1	6620	111	478	663	322	--	1300
Mursia	3/0-19	60	470	590	3/0-6/1	6620	113	478	665	322	--	1300
Mysis	3/0-19	80	470	630	3/0-6/1	6620	145	478	665	322	--	1300
Cuttlefish	4/0-7	60	522	642	2/0-6/1	5300	128	529	716	372	--	1000
Cerapus	4/0-19	60	528	648	2/0-6/1	5300	129	529	718	372	--	1000
Nepatus	4/0-19	80	528	688	2/0-6/1	5300	165	529	753	372	--	1000
Razor	4/0-7	60	522	642	4/0-6/11	8350	128	603	824	372	--	1000
Zuzara	4/0-19	60	528	648	4/0-6/	8350	129	603	826	372	--	1000
Alima	4/0-19	80	528	688	4/0-6/1	8350	165	603	861	372	--	1000
Callista	266.8-19	80	593	753	3/0-6/1	6620	188	668	930	410	--	1000
Dosinia	266.8-19	80	593	753	266.8-18/1	6880	188	761	989	410	--	1000
Cowry	336.4-19	80	666	826	4/0-6/1	8350	215	842	1151	506	--	1000
Limpet	336.4-19	80	666	826	336.4-18/1	8680	215	960	1225	506	--	1000



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of Wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	kg / km				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
	mm	mm	mm	kg	A	m	m					

### AAC

Halotis	6-Solid	1.14	4.115	6.4	6-7	255	42	110	152	78	305	762
Pike	6-7	0.76	4.67	6.2	6-7	255	31	112	143	78	305	762
Patella	6-7	1.14	4.67	7.0	6-7	255	48	112	159	78	305	762
Albus	6-7	1.52	4.67	7.7	6-7	255	64	132	198	78	305	762
Fusus	4-Solid	1.14	5.182	7.5	4-7	400	52	177	229	103	152	518
Oyster	4-7	1.14	5.89	8.2	4-7	400	60	177	237	103	152	457
Argo	4-7	1.52	5.89	8.9	4-7	400	80	177	258	103	152	457
Clam	2-7	1.14	7.42	9.7	2-7	612	76	281	359	136	152	549
Thia	2-7	1.52	7.42	10.5	2-7	612	100	281	383	136	152	549
Mussel	2-7	1.14	7.42	9.7	2-7	612	76	281	359	136	152	549
Pyrula	1-7	1.52	8.33	11.4	1-7	744	113	356	467	158	152	457
Hyas	1-19	1.52	8.43	11.5	1-7	744	115	356	469	158	152	457
Murex	1/0-7	1.52	9.35	12.4	1/0-7	903	128	385	513	182	152	366
Purpura	1/0-19	1.52	9.47	12.5	1/0-7	903	130	385	515	182	152	366
Nasa	2/0-7	1.52	10.52	13.6	2/0-7	1,139	146	566	710	210	--	457
Trophon	2/0-19	1.52	10.64	13.7	2/0-7	1,139	147	566	713	210	--	457
Quahog	3/0-7	2.03	11.79	15.9	3/0-7	1,379	214	713	926	242	--	396
Ione	3/0-19	2.03	11.94	16.0	3/0-7	1,379	217	713	929	242	--	396
Melita	3/0-19	1.52	11.94	15.0	3/0-19	1,501	168	713	881	242	--	396
Coquina	4/0-7	1.52	13.26	16.3	4/0-7	1,737	191	899	1,089	279	--	305
Tusk	4/0-7	2.03	13.26	17.3	4/0-7	1,737	243	899	1,141	279	--	305
Apus	4/0-19	2.03	13.41	17.5	4/0-7	1,737	246	899	1,144	279	--	305
Portunus	4/0-19	1.52	13.41	16.5	4/0-19	1,823	194	899	1,091	279	--	305
Chiton	266.8-19	2.03	14.88	18.9	266.8-19	2,254	277	1,133	1,409	310	--	305
Nannynose	336.4-19	2.03	16.92	21.0	336.4-19	2,790	321	1,427	1,749	330	--	305



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of Wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	kg / km				A	Coils
			Bare	OD			XLPE	Aluminum	Total			
			mm	mm			mm	kg				
AAAC												
Homarus	6-Solid	1.14	4.115	6.4	6-7	499	42	118	159	78	305	762
Minex	6-Solid	1.14	4.115	13.3	6-7	499	42	118	159	78	305	762
Cabera	6-7	1.14	4.65	6.9	6-7	499	48	118	165	78	305	671
Hippa	6-7	1.14	4.65	6.9	6-7	499	48	118	165	78	305	671
Artemia	4-Solid	1.14	5.182	7.5	6-7	499	52	162	214	103	305	518
Maira	4-7	1.14	5.89	8.2	6-7	499	60	188	247	103	305	518
Crab	4-7	1.14	5.89	8.2	6-7	499	60	162	222	103	305	518
Luidia	4-Solid	1.14	5.182	7.5	6-7	499	52	162	214	103	152	518
Prawn	4-Solid	1.14	5.182	7.5	4-7	798	52	188	240	103	152	518
Metalia	4-7	1.14	5.89	8.2	4-7	798	60	188	247	103	152	457
Barnacles	4-7	1.14	5.89	8.2	4-7	798	60	188	247	103	152	457
Solaster	2-7	1.14	7.42	9.7	4-7	798	76	258	333	136	152	549
Pagarus	2-7	1.52	7.42	10.5	4-7	798	100	258	357	136	152	549
Shrimp	2-7	1.14	7.42	9.7	2-7	1,270	76	298	374	136	152	549
Lobster	2-7	1.52	7.42	10.5	2-7	1,270	100	298	397	136	152	549
Encope	1-19	1.52	8.43	11.5	2-7	1,270	115	347	461	158	152	366
Sanderab	1/0-7	1.52	9.35	12.4	2-7	1,270	128	409	537	182	152	366
Echinus	1/0-19	1.52	9.47	12.5	2-7	1,270	130	409	539	182	152	366





# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of Wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	kg / km				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
			mm	mm			mm	mm	mm	A		
AAAC												
Gammarus	1/0-7	1.52	9.35	12.4	1/0-7	2,023	128	473	601	182	152	366
Leda	1/0-19	1.52	9.47	12.5	1/0-7	2,023	130	473	603	182	152	366
Crayfish	2/0-7	1.52	10.5	13.6	2-7	1,270	146	487	631	210	--	457
Sipho	2/0-19	1.52	10.6	13.7	2-7	1,270	147	487	634	210	--	457
Dungenese	2/0-7	1.52	10.5	13.6	2/0-7	2,445	146	595	740	210	--	457
Cyclops	2/0-7	1.52	10.6	13.7	2/0-7	2,445	147	595	743	210	--	457
Slug	3/0-7	1.52	11.8	14.8	1/0-7	2,023	165	650	816	242	--	366
Fulgur	3/0-19	1.52	11.9	15.0	1/0-7	2,023	168	650	819	242	--	366
Balanus	3/0-19	2.03	11.9	16.0	1/0-7	2,023	216	650	868	242	--	366
Stonecrab	3/0-7	1.52	11.8	14.8	3/0-7	3,080	165	752	917	242	--	366
Flustra	3/0-7	1.52	11.9	15.0	3/0-7	3,080	168	752	920	242	--	366
Crisia	3/0-19	2.03	11.9	16.0	3/0-7	3,080	216	752	969	242	--	305
Squid	4/0-7	1.52	13.3	16.3	2/0-7	2,431	191	820	1,011	279	--	305
Arca	4/0-19	1.52	13.4	16.5	2/0-7	2,431	192	820	1,012	279	--	305
Bugula	4/0-19	2.03	13.4	17.5	2/0-7	2,431	246	820	1,066	279	--	305
Kingerab	4/0-7	1.52	13.3	16.3	4/0-7	3,883	191	948	1,137	279	--	305
Lepas	4/0-19	1.52	13.4	16.5	4/0-7	3,883	192	948	1,140	279	--	305
Cassi	4/0-19	2.03	13.4	17.5	4/0-7	3,883	246	948	1,194	279	--	305



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity	Standard Package	
	Size & Number of Wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	kg / km				A	Coils
			Bare	OD			XLPE	Aluminum	Total			
			mm	mm			mm	kg				

### ACSR

Paludina	6-Solid	1.14	4.115	6.401	6-6/1	540	42	112	170	79	305	762
Voluta	6-7	1.14	4.67	6.960	6-6/1	540	48	112	176	79	305	671
Bolma	6-7	1.52	4.67	7.722	6-6/1	540	64	112	194	79	305	671
Scallop	4-Solid	1.14	5.182	7.468	6-6/1	540	52	155	225	138	152	518
Strombus	4-7	1.14	5.89	8.179	6-6/1	540	60	155	232	138	152	457
Carnea	4-7	1.52	5.89	8.941	6-6/1	540	80	155	253	138	152	457
Whelk	4-Solid	1.14	5.182	7.468	4-6/1	844	52	177	258	138	152	518
Periwinkle	4-7	1.14	5.89	8.179	4-6/1	844	60	177	263	138	152	457
Calma	4-7	1.52	5.89	8.941	4-6/1	844	80	177	284	138	152	457
Cockle	2-7	1.14	5.89	8.179	4-6/1	844	60	247	335	183	152	549
Gebia	2-7	1.52	5.89	8.941	4-6/1	844	80	247	354	183	152	549
Conch	2-7	1.14	5.89	8.179	2-6/1	1,293	60	281	384	183	152	549
Uca	2-7	1.52	5.89	8.941	2-6/1	1,293	80	281	405	183	152	549
Vermeths	1-7	1.52	8.33	11.379	1-6/1	1,610	113	354	522	210	152	457
Atya	1-19	1.52	8.33	11.379	1-6/1	1,610	113	430	524	210	152	457
Janthina	1/0-7	1.52	8.33	11.379	2-6/1	1,293	113	393	549	242	152	366
Ranella	1/0-19	1.52	9.47	12.522	2-6/1	1,293	130	393	566	242	152	366
Neritina	1/0-7	1.52	9.35	12.395	1/0-6/1	1,987	128	448	644	242	152	366
Cenia	1/0-19	1.52	9.47	12.522	1/0-6/1	1,987	130	448	646	242	152	366
Cavolinia	2/0-7	1.52	10.5	13.564	1-6/1	1,610	146	496	697	279	--	579



# Triplex Service Drop

## Aluminum Triplex Service Drop Cable

Code Word	Phase Conductors				Bare Natural		Nominal Weight			Ampacity A	Standard Package	
	Size & Number of Wires	Insulation Thickness	Nominal Diameter		Size & Number of Wires	Rated Strength	kg / km				Coils	Reels
			Bare	OD			XLPE	Aluminum	Total			
			mm	mm								
Clio	2/0-19	1.52	10.6	13.691	1-6/1	1,610	147	496	698	279	--	457
Runcina	2/0-7	1.52	10.5	13.564	2/0-6/1	2,404	146	564	796	279	--	457
Triton	2/0-19	1.52	10.6	13.691	2/0-6/1	2,404	147	564	799	279	--	457
Sanddollar	3/0-7	1.52	11.8	14.834	1/0-6/1	1,987	165	625	860	322	--	396
Aega	3/0-19	1.52	11.9	14.986	1/0-6/1	1,987	168	625	862	322	--	396
Pisa	3/0-19	2.03	11.9	16.002	1/0-6/1	1,987	216	625	911	322	--	396
Cherrystone	3/0-7	1.52	11.8	14.834	3/0-6/1	3,003	165	711	987	322	--	396
Mursia	3/0-19	1.52	11.9	14.986	3/0-6/1	3,003	168	711	990	322	--	396
Mysis	3/0-19	2.03	11.9	16.002	3/0-6/1	3,003	216	711	990	322	--	396
Cuttlefish	4/0-7	1.52	13.3	16.307	2/0-6/1	2,404	191	787	1,066	372	--	305
Cerapus	4/0-19	1.52	13.4	16.459	2/0-6/1	2,404	192	787	1,069	372	--	305
Nepatus	4/0-19	2.03	13.4	17.475	2/0-6/1	2,404	246	787	1,121	372	--	305
Razor	4/0-7	1.52	13.3	16.307	4/0-6/11	3,788	191	897	1,226	372	--	305
Zuzara	4/0-19	1.52	13.4	16.459	4/0-6/	3,788	192	897	1,229	372	--	305
Alima	4/0-19	2.03	13.4	17.475	4/0-6/1	3,788	246	897	1,281	372	--	305
Callista	266.8-19	2.03	15.1	19.126	3/0-6/1	3,003	280	994	1,384	410	--	305
Dosinia	266.8-19	2.03	15.1	19.126	266.8-18/1	3,121	280	1,133	1,472	410	--	305
Cowry	336.4-19	2.03	16.9	20.980	4/0-6/1	3,788	320	1,253	1,713	506	--	305
Limpet	336.4-19	2.03	16.9	20.980	336.4-18/1	3,937	320	1,429	1,823	506	--	305

\*40°C ambient, 90 °C temperature; sun and wind.  
The above data are approximate and subject to normal manufacturing tolerances.