


## Battery Cable

Flexible Soft Copper Conductor, Black PVC Insulated

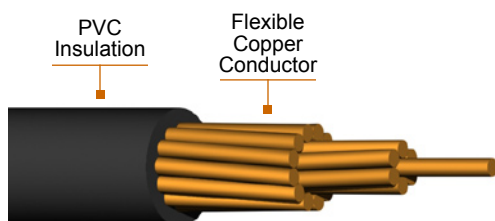

### Detail Description or Construction

#### Conductor

Flexible soft copper conductor

#### Insulation

Polyvinyl Chloride (PVC)

### Application

Automotive batteries connections.

### Standards / Testing Specifications

- SAE J-1127; ASTM B 173.

### Marking

PHELPS DODGE BATTERY  
CABLE SIZE AWG PVC.

### Installation

The temperature of installation  
does not have to exceed 75°C.



## Battery Cable

Flexible Soft Copper Conductor, Black PVC Insulated

Conductor Size	Number of Wires	Insulation Thickness	Overall Diameter (approx)	Weight (approx)	Standard Package
AWG		mm	mm	Kg / Km	m / rolls
6	133	1.73	8.8	170	100
4	133	1.73	10.2	263	100
2	133	1.73	11.9	394	100
1	259	1.73	13.0	484	100
1/0	259	1.73	14.2	598	100
2/0	259	1.73	15.5	739	100

Data shown is approximated and subject to normal manufacturing tolerances.