

458

EPDM FLOODLIGHT

INDUSTRIAL

This high wattage, weatherproof, robust EPDM floodlight range has excellent vibration resistance making it ideal for use in hostile environments.

The 458 is manufactured from EPDM rubber with a heavy duty borosilicate front glass and wire guard for maximum protection. The 458 is suitable for GLS and HPS lamps with maximum continuous operating temperature of +30°C.

Models with GLS lamps can operate at an ambient temperature as low as -40°C. A 501 control gear box is required for models with HPS lamps.



Standard Specification




Ingress Protection:	IP65 to EN60529
Enclosure:	EPDM rubber with toughened front glass
Entries:	1 x 10mm Ø cable entry point complete with cable clamp
Termination:	2 core 1.5mm² max conductors
Mounting:	Via lifting hook (Portable handlamp version) Base-mounted or pole-mounted available as alternatives
Control Gear:	N/A
Relamping:	Via stainless steel clamp screw
Electrical Supply:	250V Max ac/dc (Always state V/Hz when ordering)
Protection:	Class II

Std. Cat No.	Wattage	Lamp type	Lampholder	Weight
458/150/HS	150W	HPS	E40	4.2kg
458/250/HS	250W	HPS	E40	4.2kg
458/300/GL	300W	GLS	GLS	4.2kg

Options - Suffix to Catalogue No.

/B Base-mounted

/PM Pole-mounted

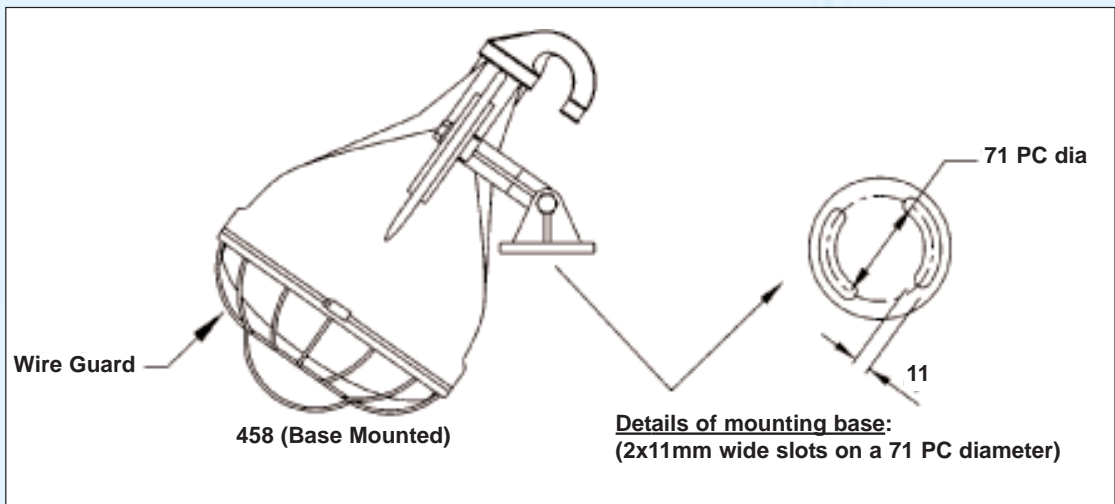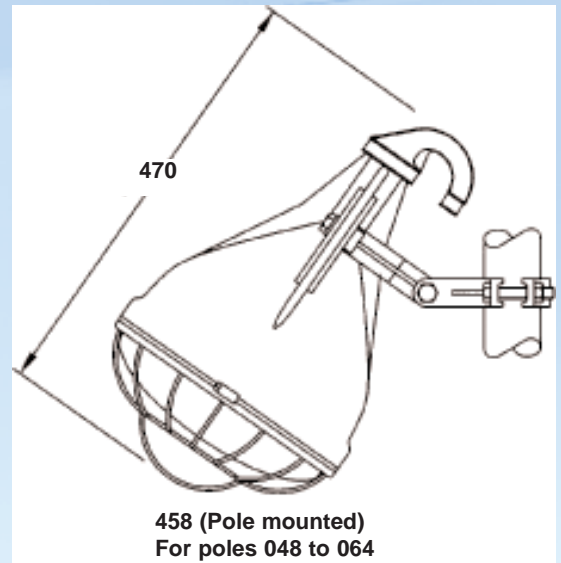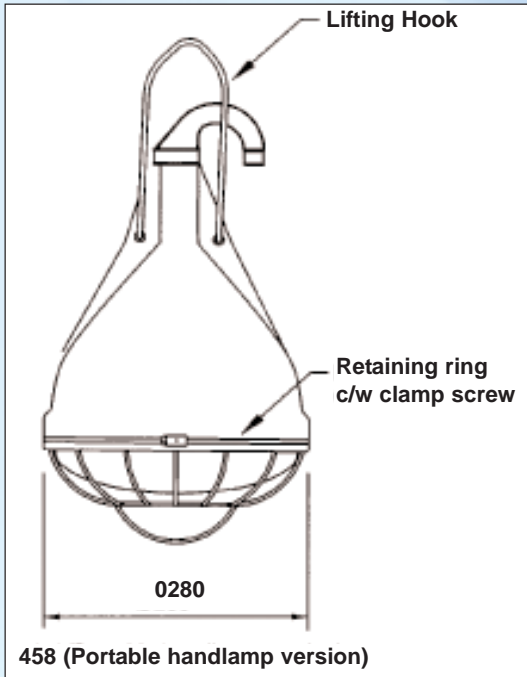

Product design and specification are subject to change without notice.
Please check website for latest specification



Electrical Products

Rev 02 - Sept 2006