

489

EPDM BULKHEAD

INDUSTRIAL

This compact and lightweight EPDM bulkhead range has excellent vibration resistance making it ideal for use in hostile environments. The 489 is manufactured from EPDM rubber and has a high impact polycarbonate lens to give maximum protection.

The range is suitable for compact fluorescent, HID and GLS lamps with a recommended maximum continuous operating ambient temperature of +30°C. Models with GLS lamps can operate at an ambient temperature as low as -40°C.

All control gear for compact fluorescent models and HID lamp models is contained within the EPDM enclosure.





Standard Specification

Ingress Protection:	IP65 to EN60529
Enclosure:	EPDM rubber with polycarbonate lens
Entries:	1 x M20 cable entry
Termination:	2 core 1.5mm² conductors
Mounting:	4 x 9mm clearance holes on two aluminium mounting straps
Control Gear:	Copper/iron control gear (HID & compact fluorescent models)
Relamping:	Via stainless steel clamp screw
Electrical Supply:	240V 50Hz (Compact fluorescent) 220-240V 50Hz (HID lamps) 250V Max ac/dc (GLS model) (Always state V/Hz when ordering)

Std. Cat No.	Wattage	Lamp type	Lampholder	Weight
489I/113/CF	1 x 10/13	CFL	G24	4.0kg
489i/022/CF	22	Circular fluorescent	G10q	4.0kg
489I/050/HS	50	HPS	E27	5.0kg
489I/070/MS	70	HPS/Metal Halide	E27	5.0kg
489I/080/MV	80	MBFU	E27	4.6kg
489I/200/GL	200	GLS	E27	4.0kg

Options - Suffix to Catalogue No.

/LO	Looping
/SS	Stainless steel mounting straps

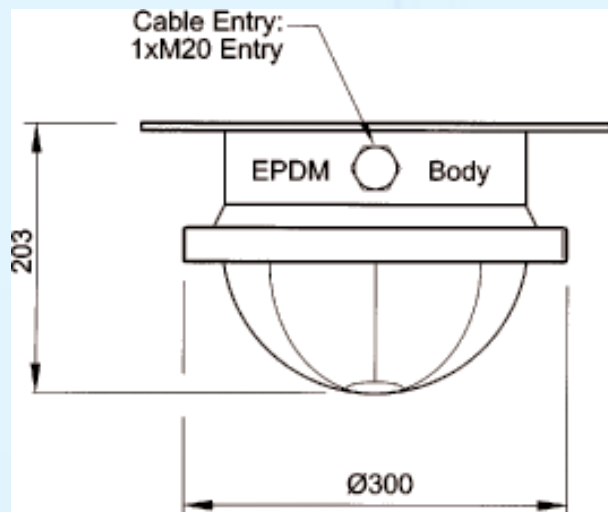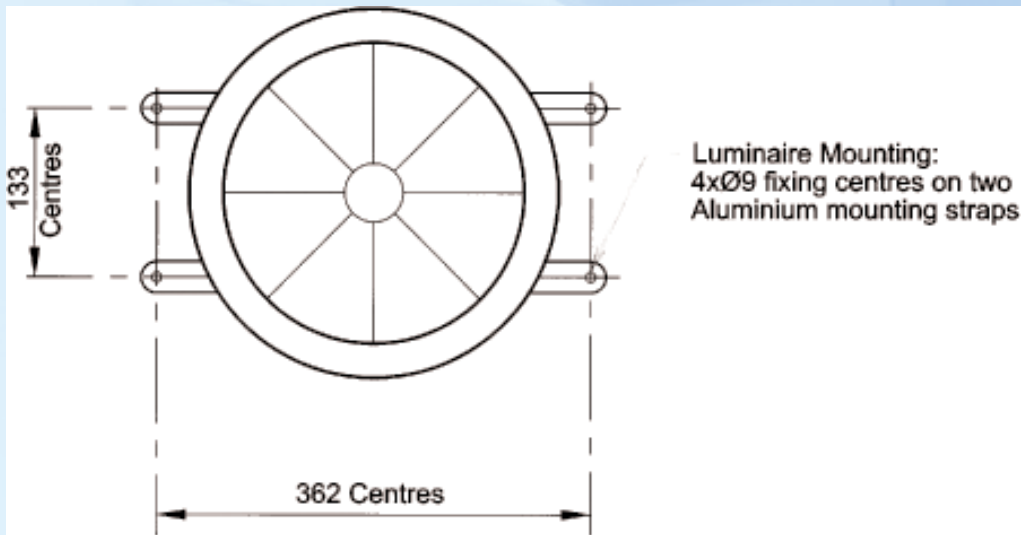

Product design and specification are subject to change without notice.
Please check website for latest specification



Electrical Products

Rev 02 - Sept 2006