DEXLUX STAINLESS STEEL FLOODLIGHT

The Dexlux floodlight range is constructed from 316S31 marine grade stainless steel and is designed from hostile marine environments. They are available with a wide range of tungsten halogen lamp wattages.

In addition to being compact and lightweight, there are a number of additonal options such as antivibration damper assembly, anti-glare shield and wire guard making the Dexlux and extremely popular marine floodlight range.

INDUSTRIAL



Standard Specification

Ingress Protection:	IP66/67 to EN60529
Enclosure:	316S31 marine grade stainless steel body with toughened glass window. silicone rubber gasket adn GRP terminal box.
Entries:	1 x 20mm clearance hole in junction box
Termination:	3 core 6mm ² max conductors
Reflector:	Wide beam high purity anodised aluminium
Mounting:	Stirrup bracket
Control Gear:	N/A
Relamping:	Via front cover and quick release clips
Electrical Supply:	250V Max ac/dc




Std. Cat No.	Wattage	Lamp type	Lampholder	Weight
DEXI/200/TL	200	Tungsten-Halogen	R7s	5kg
DEXI/500/TL	500	Tungsten-Halogen	R7s	6.5kg
DEXI/1000/TL	1000	Tungsten-Halogen	R7s	9kg


Ē

Options - Suffix to Catalogue No.

/M25	1 x 25mm cable entries
/WA	Suitable for wire guard or anti-glare shield



DIMS	200W	500W	1000W
Α	235	290	385
В	275	275	275
С	75	75	75
D	230	325	425
E	200	200	295
F	200	200	235
G	175	175	200
Н	105	105	155
WEIGHT	5kg	6.5kg	9kg

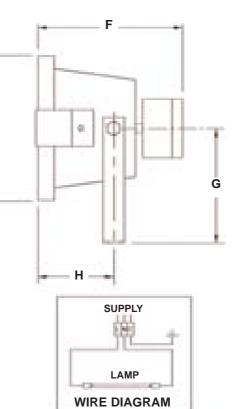

Accessories (Should be ordered separately)	Catalogue Order Code
Anti-vibration damper	S8000-0001
Pole-mounting bracket assembly (inc fixings)	S8134-0002
Anti-glare shield - 200W (luminaire requires /WA suffix when ordering)	N8004-0269
Anti-glare shield - 500W (luminaire requires /WA suffix when ordering)	N8004-0215
Anti-glare shield - 1000W (luminaire requires /WA suffix when ordering)	N8234-0001
Wire Guard - 200W (luminaire requires /WA suffix when ordering)	E0850-0024
Wire Guard - 500W (luminaire requires /WA suffix when ordering)	E0850-0025
Wire Guard - 1000W (luminaire requires /WA suffix when ordering)	E0850-0041

Product design and specification are subject to change without notice. Please check website for latest specification



R