

New Push-in Stopping Plug



Ex Press



**No Locknut
Required**




Ex tra-Fast

Push-in Stopping Plug

Ex Press Increased Safety EExe

APPLICATION DATA

Clearance Hole	Gland Plate Thickness	Min/Max Clearance Hole Ø
M20	2mm - 3mm	20mm - 20.7mm

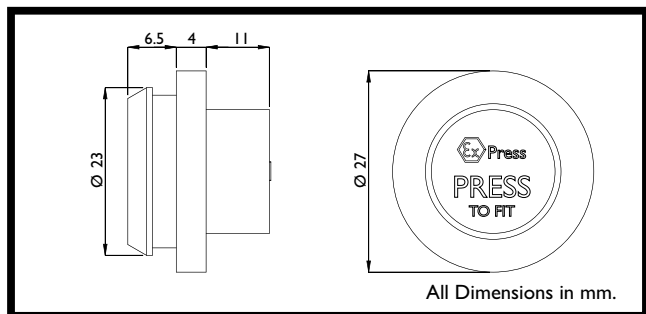

Technical Data

- Increased Safety EExe. **Ex** II 2 GD EExe II.
- **Ex** Press Plug Baseefa Certificate No. Baseefa 04 ATEX 0168U.
- Suitable for use in Zone 1, Zone 2, Zone 21 & Zone 22.
- Construction and test standards EN 50014, EN 50019 and EN 50281-1-1. IEC 60079-0 and IEC 60079-7.
- Meets IP66 ingress protection for S Series and EZE Series Enclosures.
- DTS01 deluge protection witnessed by EECS.
- Operating temperature range -40°C to +80°C.