


Cable Gland Accessories

Flameproof, Increased Safety and Industrial



PVC Shrouds

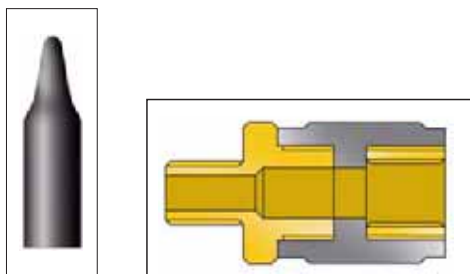

PCP Shrouds



SHROUD SELECTION TABLE
Size Ref. #
O/Os
A
B
C
C2
D
E
F
G
H
J

Application

- Outdoor or Indoor use.
- For fitting over cable glands when additional environmental and corrosion protection is required.

Materials & Finishes

Hawke shrouds are supplied in black as standard.


Ordering Examples

Shroud Type/Size

e.g. PVC Shroud/C
PCP Shroud/C

Cable Gland Accessories

Insulated Adaptor Type 478

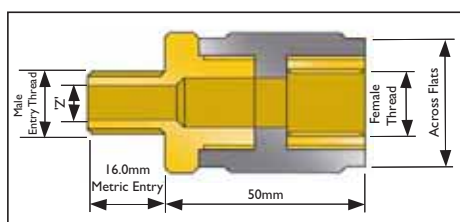

INSULATED ADAPTOR SELECTION TABLE					
Size Ref.	Male Thread	Female Thread	'Z' Bore	Hexagon Dimensions	
	Metric	Metric		Across Flats	Across Corners
A	M20	M20	14.3	35.0	40.0
B	M25	M25	19.3	41.0	47.0
C	M32	M32	25.8	49.0	54.0
C2	M40	M40	33.0	55.0	63.5
D	M50	M50	43.0	70.0	80.5
E	M63	M63	54.0	80.0	92.4
F	M75	M75	67.0	90.0	103.5

Application

- Outdoor or Indoor use.
- Provides electrical insulation between a cable gland or a conduit fitting and an electrical enclosure. e.g. to provide a means of isolating armour/braid on signal/instrument cable.

Technical Data

478 Certification and Approval

- Certificate No. SIRA 06 ATEX I240U.
- Exd IIC.
- Suitable for use in Zone 1 and Zone 2.
- Suitable for use in Gas Groups IIA, IIB and IIC.

Ordering Example

Insulated Adaptor/Size/Male Thread/Female Thread
e.g. 478/1/C/M32/M32

General Information

All dimensions in millimetres.

Materials & Finishes

Insulated portion manufactured from glass filled nylon.
Female insert and entry component are manufactured as standard in brass.