



## Mounting Accessories for Mounting in Rows



Profile rail for mounting in rows of EXLUX fluorescent light fittings. Mounting and installation is simplified when light fittings are arranged in rows. The profile rail can also be used as a cable tray.

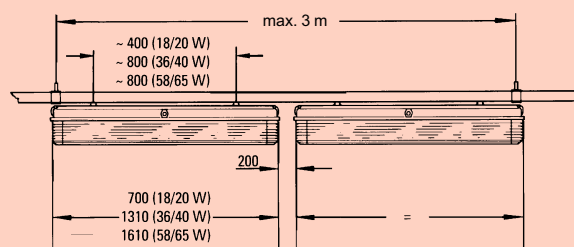

### Selection table

Designation	Pos.	Illustration	Description	Unit	Ordering code	Weight [kg]
Profile rail	1		Sheet steel, galvanized, thickness 1,5 mm	3 m	<b>461 689 0</b>	4,4
Lockable cover	2		Sheet steel, galvanized, thickness 1 mm	3 m	<b>461 590 0</b>	1,8
Suspension bracket	3		Sheet steel, galvanized	1	<b>461 592 0</b>	0,02
Ring bolt	4			1	<b>461 685 0</b>	0,18
Cable protection grommets	5		to protect cable sheaths, polyamide			
			for side slot	1	<b>461 655 0</b>	0,003
			for base slot	1	<b>461 656 0</b>	0,004
Locking screw with accessories	6		for mounting light fitting to profile rail, M6/M8 x 60	1	<b>60 008 01 90 0</b>	0,030
Connection plate	7		to join two profile rails	1	<b>461 712 0</b>	0,070
Connection screw	8		flat headed screw and nut	1	<b>461 619 0</b>	0,010
Suspension chain	8		Knotted link chain, length 1,2 m, other lengths on request; breaking load 250 kp	1,2 m	<b>461 680 0</b>	0,1
Open link for suspension chain	9		to connect suspension chain and ring bolt	1	<b>461 679 0</b>	0,01
Suspension chain	10		Length 1,5 m, other lengths on request	1,5 m	<b>461 681 0</b>	0,05
Mounting rail for EXLUX light fitting			for variable mounting distance to match up with long slots of profile rail	1 pair	<b>60 008 02 75 0</b>	0,32