



Emergency Light Fitting Series EXLUX 6408

- Can be used in Zone 2
- As pendant or pole-mounting fittings
- For two-pin fluorescent lamps
- With electronic ballast and integral emergency light unit
- 2-lamp version:
18 W / 20 W, 36 W / 40 W
- Central locking
- Enclosure in polyester resin; cover in polycarbonate
- Maintained emergency operation 1.5 h or 3 h
- In non-maintained operation or non-maintained operation with switchable emergency light blocking
- With or without self-test function

STAHL

Series **EXLUX 6408** emergency light fittings can be used for safety illumination.

Zone 2

Selection table

Version	Lamp	Battery capacity	Emergency light duration	Self-test function	Ordering code		Weight [kg]
					Standard fitting	Pole-mounting fitting	
EXLUX 6408 for use in Zone 2	with electronic ballasts, for two-pin fluorescent lamps						
	2 x 18 W	7 Ah	1,5 / 3 h	with	6408/522-90□7	6408/822-9087	9,3/11,5
				without	6408/522-90□8	6408/822-9088	9,3/11,5
	2 x 36 W	7 Ah	1,5 h / 3 h	with	6408/542-9□□7	6408/842-9087	12,0/14,2
without				6408/542-9□□8	6408/842-9088	12,0/14,2	

Add. to ordering code

Through wiring	without with 6-cores	6008/. . . -90□7 6008/. . . -96□7	
Cable entries	Standard Special	6008/. . . -9□17 6008/. . . -9□97	Specify when ordering

Remarks

Maintained operation ist standard on delivery, by removing a jumper and connecting an external switch this can be changed to switchable confirmed operation.


The light fittings are supplied without tubes. These accessories must be ordered separately.

Pole-mounting fitting, 18/20 W, cable entry: only lateral entries possible.

Technical data

Explosion protection	Ex n A II T4
Test certificate	TÜV No. 08/220/1111/6
Rated voltage	220 V – 10% ... 254 V + 6%
Cable entries	1 cable gland M25 x 1,5 2 plugs M25 x 1,5 for other options (see ELUX 6008)
Protection class	I
Degree of protection	IP 66, IP 67
Further technical data	see EXLUX 6008 see pages 7/38 ... 7/40

Dimensions (in mm)

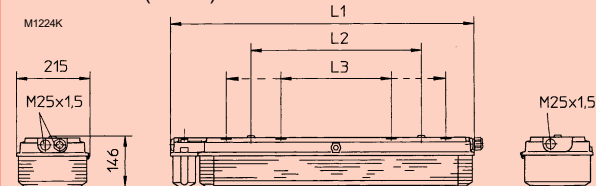


Dimensions

	Light fitting 18/20 W	36/40 W
L1	782	1392
L2 ¹⁾	400	800
L3 ²⁾	312 ... 465	670 ... 865

¹⁾ fixed mounting distance

²⁾ variable mounting distance

Emergency light fitting EXLUX 6008, EXLUX 6408
Standard fitting

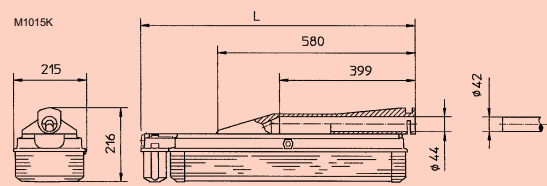

Dimensions

	Light fitting 18/20 W	36/40 W
L	806	1416

Emergency light fitting EXLUX 6008, EXLUX 6408
Pole-mounting fitting

